

JONATHAN 340QD 简介

碳钢伸缩滑轨 | 340 系列中载型钢制滑轨

340 系列滑轨结构坚固、选配方案丰富，完美适配工业设备、医疗设备、仓储柜体等中载荷使用场景。滑轨规格：宽度 1.38 英寸、高度 0.75 英寸；标配基础结构，支持全规格定制，材质：不锈钢，满足严苛工况需求。Jonathan 340 系列滑轨每副额定承重最高 135 磅。

材质：钢材



额定载荷：单副最大 135 磅

标准长度：10 英寸~30 英寸

拉出行程：10 英寸~30 英寸（全伸行程等同滑轨总长）

表面处理：透明镀锌（透明铬酸盐钝化）

配套支架：可选 BK-5 型配套安装支架

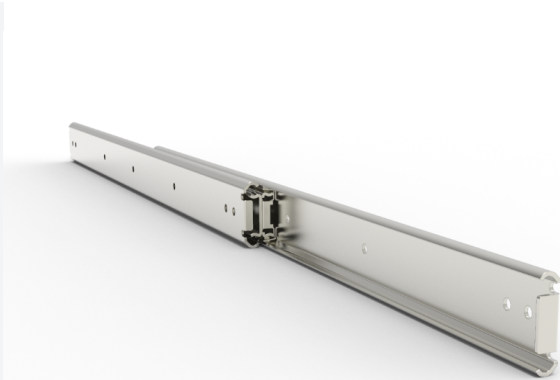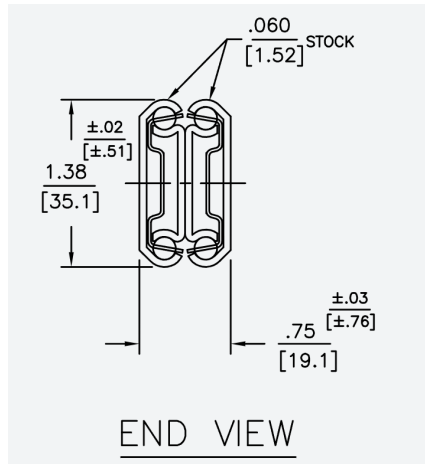

340QD基础参数


340QD 为滚珠全伸式滑轨，集成开档锁止 + 快速拆卸拨杆两大功能。

安装方式灵活：侧装、底挂立式安装，轻载工况可平底平装。

标配结构：快拆拨杆、拉出全开锁止

额定承受重：最高 135 磅 / 副

可选表面镀层：透明蓝锌、黄彩锌、黑电镀锌、白电镀锌

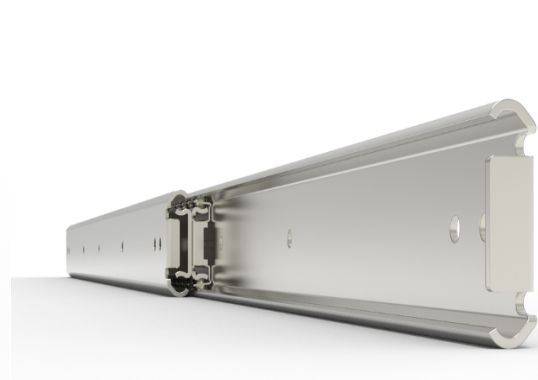


JONATHAN 340QD Specifications


NOTES:

1. SLIDE IS SYMMETRICAL. MAY BE USED AS LEFT OR RIGHT HAND SLIDE.
2. HOLES OTHER THAN SHOWN MAY BE IN THE SLIDE MEMBERS AT JONATHAN OPTION.
3. FOR "EIA/RETMA" BRACKETS, SEE SEPARATE SECTION.
4. USE NUMBER 8 PAN OR BINDING HEAD SCREWS FOR MOUNTING THRU THE SLIDE MEMBERS.



- 5 SLIDE IS PROVIDED WITH LOCK OPEN FEATURE AND QUICK DISCONNECT.



ISOMETRIC REPRESENTATION



END VIEW

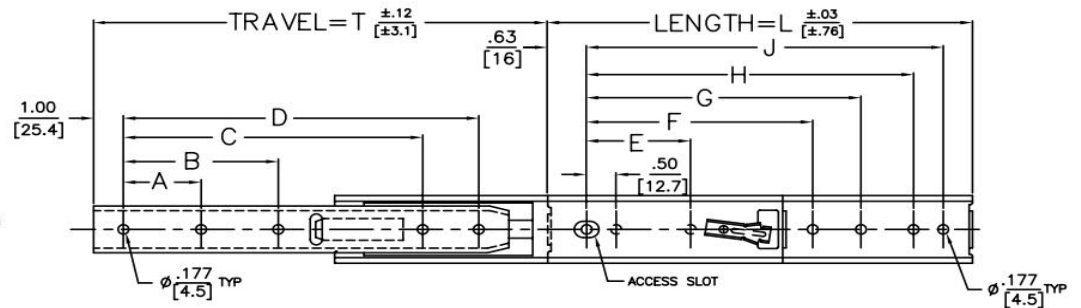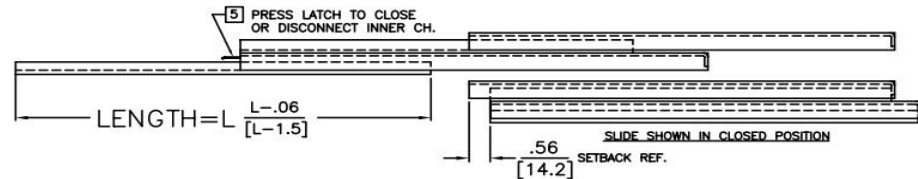

PART NO.	SLIDE LENGTH	SLIDE TRAVEL	MOUNTING HOLE PATTERN										LOAD RATING
SERIES LENGTH	DIM. L	DIM. T	INNER CHANNEL				OUTER CHANNEL						PER PAIR
			A	B	C	D	E	F	G	H	J		
340QD-12	12	12.88			4.000		8.500	3.375		5.875	10.250	10.750	135 LBS
	304.8	327			101.60		215.90	85.73		149.20	260.40	273.10	61 KG
340QD-14	14	14.88			4.000		9.500	4.375		7.875	12.250	12.750	131 KG
	355.6	378	101.60	127.00	241.30	266.70	111.10		200.00	311.20	323.90	60 KG	
340QD-16	16	16.88			4.000		10.500	4.375		9.875	14.250	14.750	128 LBS
	406.4	429	101.60	152.40	266.70	317.50	111.10		250.80	362.00	374.70	58 KG	
340QD-18	18	18.88			4.000		11.500	4.375	8.375	11.875	16.250	16.750	125 LBS
	457.2	480	101.60	177.80	292.10	368.30	111.10	212.70	301.60	412.80	425.50	57 KG	
340QD-20	20	20.88			4.000		13.000	4.375	9.375	13.875	18.250	18.750	120 LBS
	508	530	101.60	203.20	330.20	419.10	111.10	238.10	352.40	463.60	476.30	55 KG	
340QD-22	22	22.88			4.000		14.000	4.375	10.375	15.875	20.250	20.750	115 LBS
	558.8	581	101.60	228.60	355.60	469.90	111.10	263.50	403.20	514.40	527.10	52 KG	
340QD-24	24	24.88			4.000		15.000	4.375	11.375	17.875	22.250	22.750	110 LBS
	609.6	632	101.60	259.00	381.00	482.70	111.10	288.90	454.00	565.20	577.90	50 KG	
340QD-26	26	26.88			4.000		16.000	4.375	12.375	19.875	24.250	24.750	105 LBS
	660.4	683	101.60	279.40	406.40	511.50	111.10	314.30	504.80	616.00	628.70	48 KG	
340QD-28	28	28.88			4.000		18.000	4.375	13.375	21.875	26.250	26.750	100 LBS
	711.2	734	101.60	304.80	457.20	622.30	111.10	339.70	555.60	666.80	679.50	45 KG	
340QD-30	30	30.88			4.000		20.000	4.375	14.375	23.875	28.250	28.750	95 LBS
	762	784	101.60	330.20	457.20	660.40	111.10	365.10	606.40	717.60	730.30	43 KG	



Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel: (714) 665-4400
Website: www.JonathanEngr.com
Engineering • Production • Integration / Subassembly • Logistics
United States • Mexico • China • Taiwan

DIMENSIONS SHOWN AS:	IN.
	[MM]
TOLERANCE UNLESS OTHERWISE NOTED	
.XX	±.020
.X	[±.5]
.XXX	±.010
.XX	[±.25]
ANGLES	±1°

PART NO.	340QD
DATE:	6/04

DESCRIPTION:
STEEL
SERIES 340QD
LOAD RATING: 95-135 LBS./ 43-66 KG.

COPYRIGHT © 2004 JONATHAN ENGINEERED SOLUTIONS