


## SELF LOCKING NUTS - NYLON INSERT

### MS17825

HEX, CASTELLATED, REGULAR HEIGHT

MATERIAL - ALLOY STEEL

FINISH - CAD TYPE II PER QQ-P-416

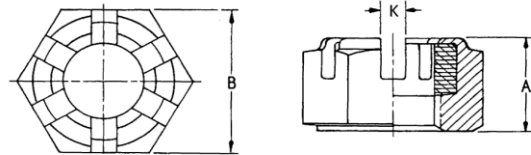


DASH #	THREAD UNJF-3B	A DIM	B DIM	K MAX	TENS. LBS/MIN
3	10-32	.235-.265	.367-.376	0.108	1950
4	1/4-28	.266-.296	.430-.439		3500
5	5/16-24	.313-.343	.492-.502		5500
6	3/8-24	.391-.421	.553-.564	0.155	9000
7	7/16-20	.438-.468	.679-.690		12200
8	1/2-20	.548-.578	.741-.752		16600
9	9/16-18	.594-.624	.865-.877	0.187	21200
10	5/8-18	.704-.734	.928-.940		27400
12	3/4-16	.798-.828	1.052-1.064		40000

### MS17826

HEX, CASTELLATED, THIN

MATERIAL - ALLOY STEEL

FINISH - CAD TYPE II PER QQ-P-416

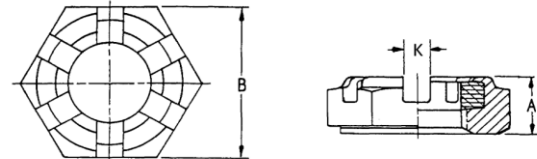

DASH #	THREAD UNJF-3B	A DIM	B DIM	K MAX	TENS. LBS/MIN
3	10-32	.173 - .203	.367 - .376	0.108	1000
4	1/4-28		.430 - .439		1800
5	5/16-24		.492 - .502		2900
6	3/8-24	.204 - .234	.553 - .564	0.155	4100
7	7/16-20		.679 - .690		5000
8	1/2-20		.741 - .752		5600
9	9/16-18	.298 - .328	.865 - .877	0.187	7800
10	5/8-18		.928 - .940		10000
12	3/4-16		1.052 - 1.064		15500