



JONATHAN 310 / 310L Specifications

NOTES:

- 310- SLIDE WITHOUT LOCK
310L- SLIDE WITH LOCK
1. THE SLIDE IS SYMMETRICAL. MAY BE USED AS A LEFT OR RIGHT HAND SLIDE.
 2. HOLES OTHER THAN THOSE SHOWN MAY BE IN THE SLIDE MEMBERS AT JONATHAN OPTION.
 3. FOR "E.I.A./RETMA" BRACKETS, SEE SEPARATE SECTION.
 4. NON-METALLIC STOPS OPEN AND CLOSED.
 5. SLIDE IS PROVIDED WITH LOCK OPEN FEATURE (OPTIONAL).
 6. USE NUMBER 8 PAN OR BINDING HEAD SCREWS FOR MOUNTING THRU THE SLIDE MEMBERS.
 7. SLIDE IS SUITABLE FOR UNDERMOUNT.  (LOAD RATING CAPACITY IS 70% LESS)




ISOMETRIC REPRESENTATION



END VIEW

PART NO.	SLIDE LENGTH	SLIDE TRAVEL	MOUNTING HOLE PATTERN							LOAD RATING
SERIES	DIM. L	DIM. T	INNER CHANNEL			OUTER CHANNEL				PER PAIR
LENGTH			A	B	C	D	E	F	G	
310-12	12	13	3.000	7.000	10.000	3.000	7.500	9.500	10.500	135 LBS
310L-12	304.8	330	76.20	177.80	254.00	76.20	190.50	241.30	266.70	61 KG
310-14	14	15	4.000	8.000	12.000	3.500	8.500	11.500	12.500	131 LBS
310L-14	355.6	381	101.60	203.20	304.80	88.90	215.90	292.10	317.50	60 KG
310-16	16	17	5.000	9.000	14.000	5.000	9.500	13.500	14.500	128 LBS
310L-16	406.4	432	127.00	228.60	355.60	127.00	241.30	342.90	368.30	58 KG
310-18	18	19	5.000	11.000	16.000	5.000	11.500	15.500	16.500	125 LBS
310L-18	457.2	483	127.00	279.40	406.40	127.00	292.10	393.70	419.10	57 KG
310-20	20	21	6.000	12.000	18.000	6.000	12.500	17.500	18.500	120 LBS
310L-20	508	533	152.40	304.80	457.20	152.40	317.50	444.50	469.90	55 KG
310-22	22	23	7.000	13.000	20.000	7.000	13.500	19.500	20.500	115 LBS
310L-22	558.8	584	177.80	330.20	508.00	177.80	342.90	495.30	520.70	52 KG
310-24	24	25	7.000	15.000	22.000	7.000	15.500	21.500	22.500	110 LBS
310L-24	609.6	635	177.80	381.00	558.80	177.80	393.70	546.10	571.50	50 KG
310-26	26	27	8.000	16.000	24.000	8.000	16.500	23.500	24.500	105 LBS
310L-26	660.4	686	203.20	406.40	609.60	203.20	419.10	596.90	622.30	48 KG
310-28	28	29	9.000	17.000	26.000	9.000	17.500	25.500	26.500	100 LBS
310L-28	711.2	737	228.60	431.80	660.40	228.60	444.50	647.70	673.10	46 KG

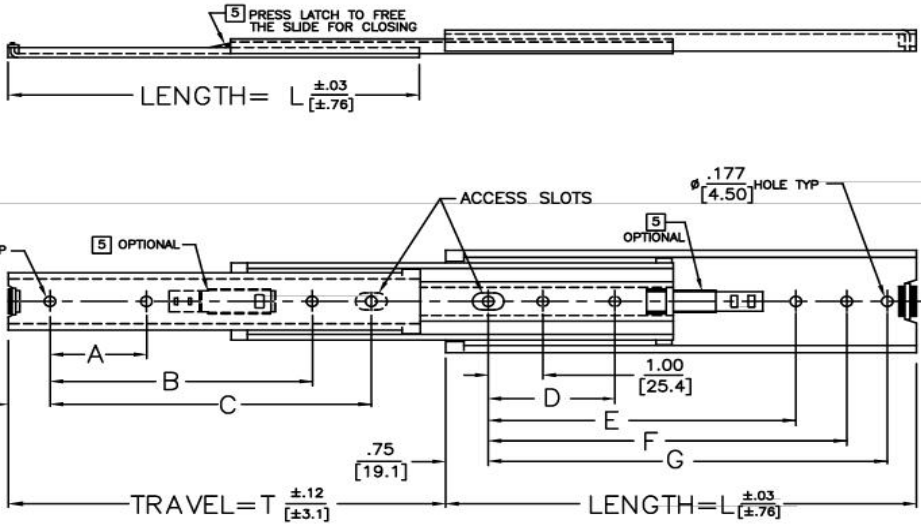


Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel: (714) 665-4400
Website: www.JonathanEngr.com
Engineering • Production • Integration/Subassembly • Logistics
United States • Mexico • China • Taiwan

DIMENSIONS SHOWN AS:	PART NO.	DESCRIPTION:
IN. [MM]	310/310L	STEEL
TOLERANCE UNLESS OTHERWISE NOTED	DATE: 6/04	SERIES 310/310L
.XX ±.020 .X [±.5]		LOAD RATING: 100-135 LBS./ 46-61 KG.
.XXX ±.010 .XX [±.25]		
ANGLES ±1°		

COPYRIGHT © 2004 JONATHAN ENGINEERED SOLUTIONS

JONATHAN 310D / 310LD Specifications

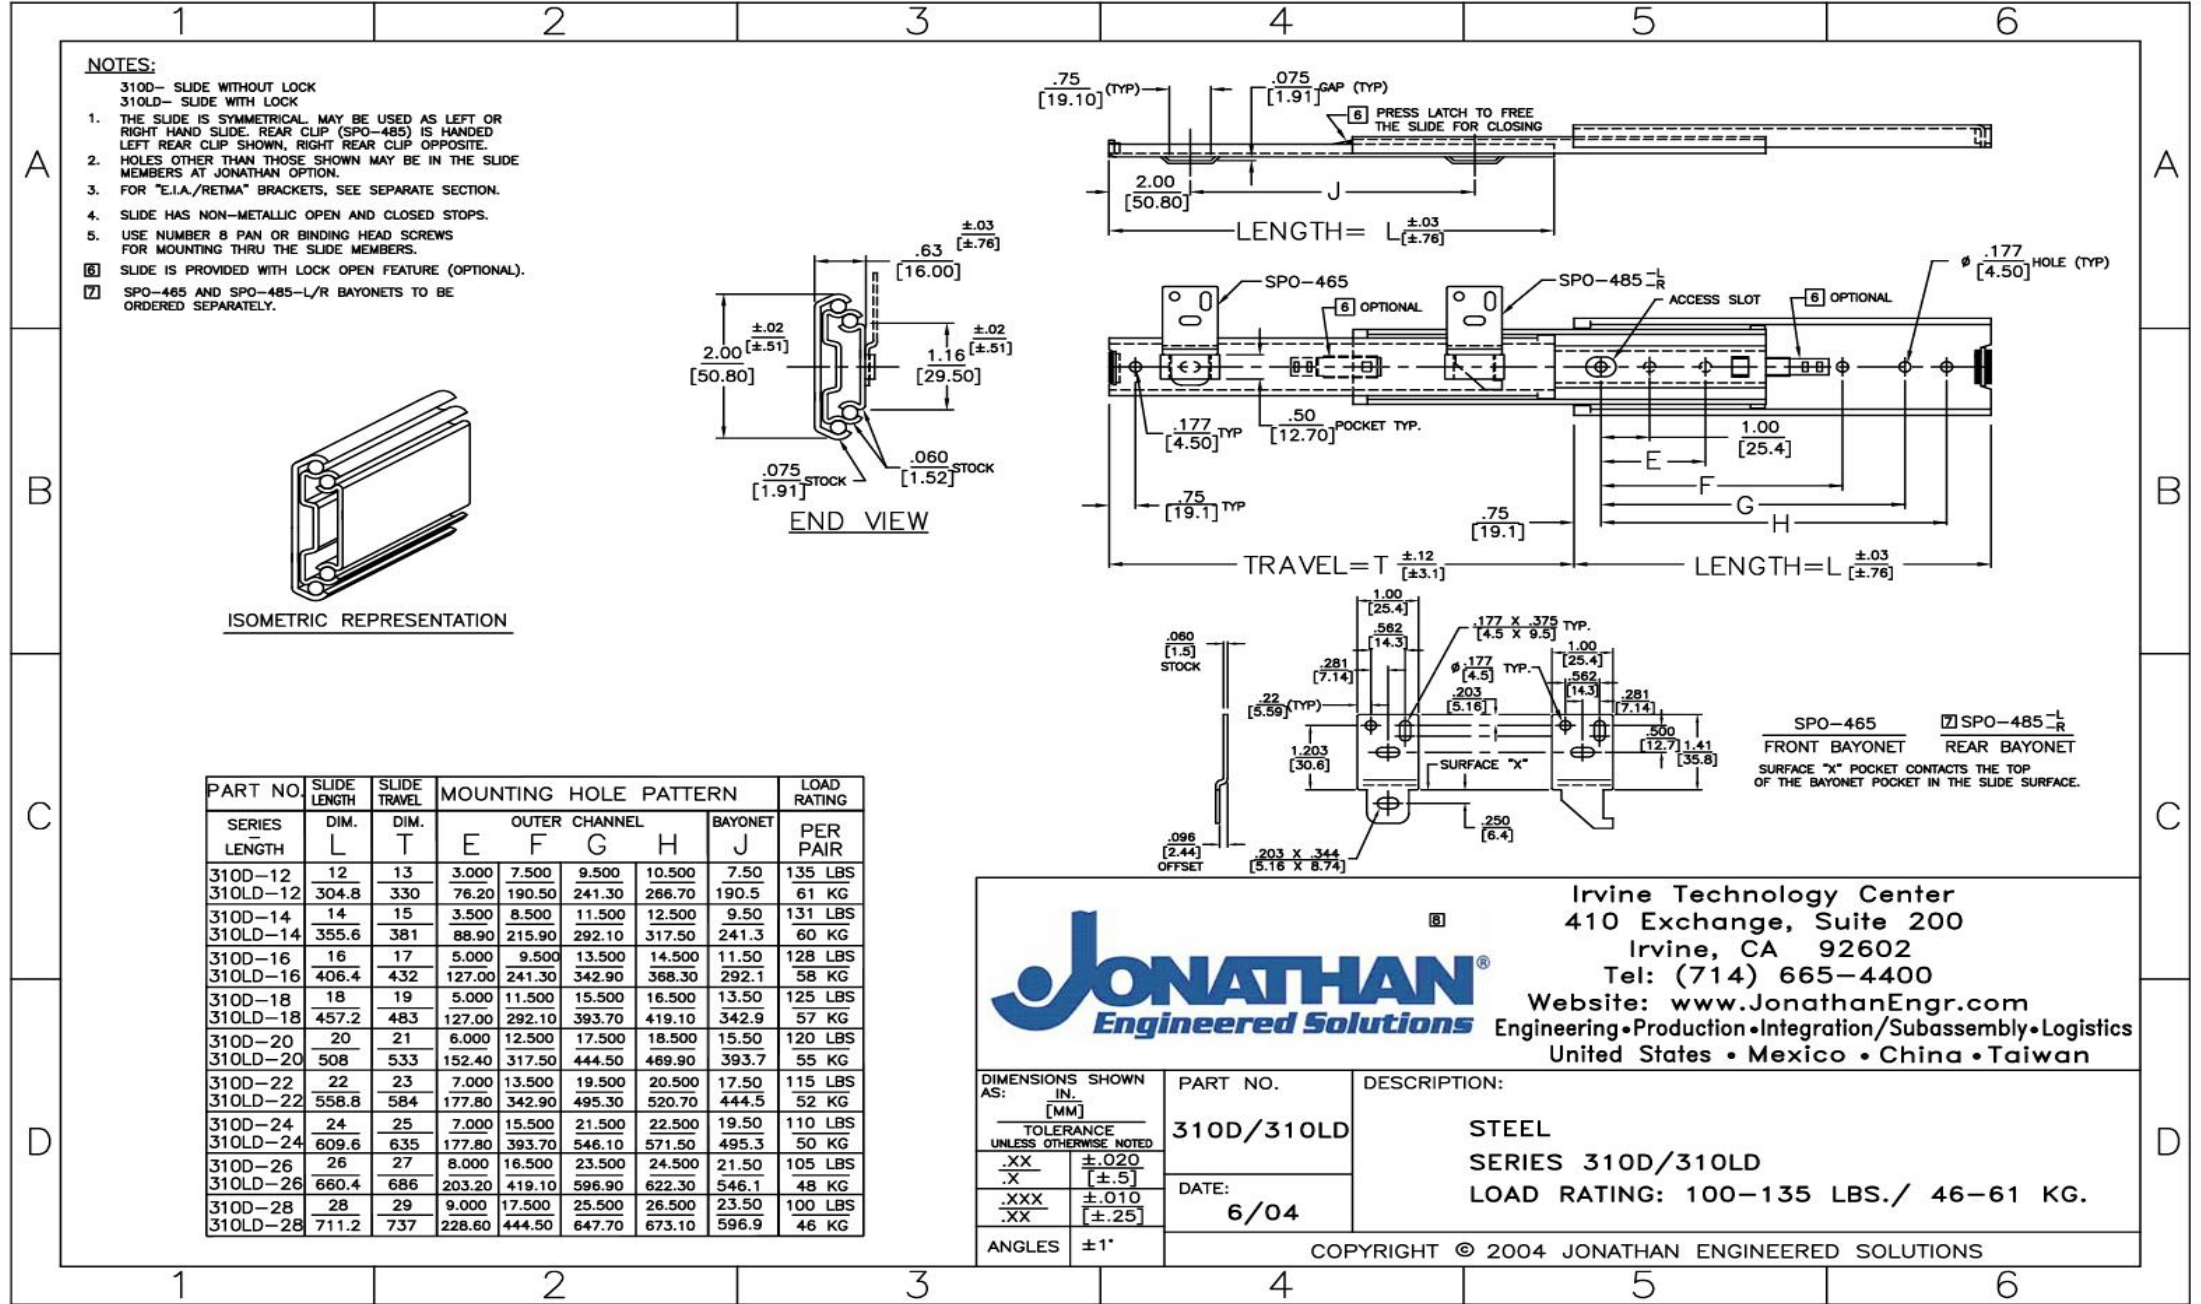

1

2

3

4

5

6

D